


Reinforced Subgrade Stabilization



Note: Support Fabric can also be used for Stabilization of large areas in new construction. Procedures are generally the same as would be encountered in stabilizing existing paving.

1. Layout and mark all areas of undercut repair.
2. Excavate areas to be undercut to a depth of ". Dispose of all debris offsite.
3. Square surface of undercut and walls of undercut to produce vertical edges.
4. Install a layer of support fabric according to manufacture's specifications to enhance lateral foundation support and prevent combination of refill aggregates.
5. Refill undercut area with " of " stone aggregate.
6. Refill remaining undercut area with " of " stone aggregate.
7. Roll aggregate surface to achieve a true and firm finish.
8. Install specified finish.

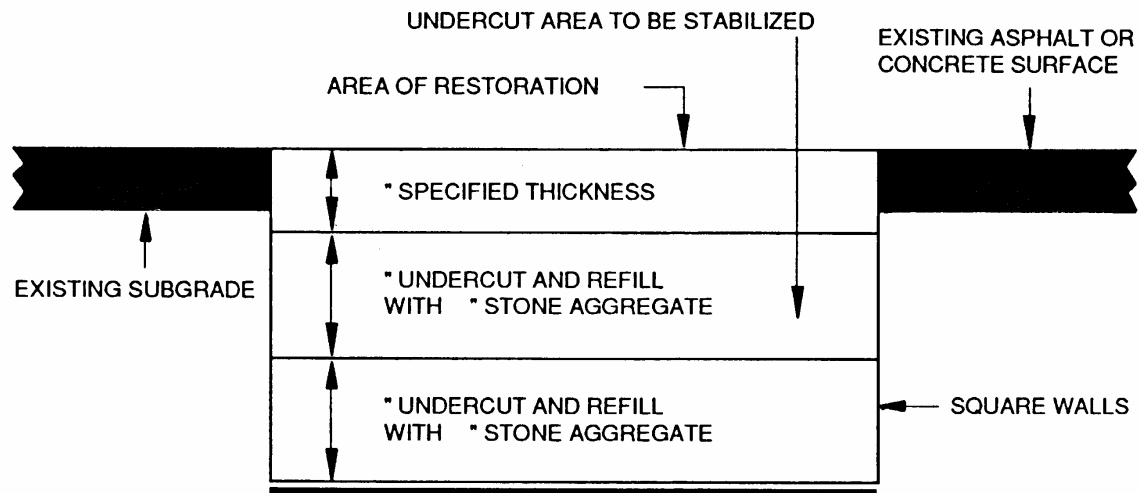