


## Restoration of Existing Light Pole Base

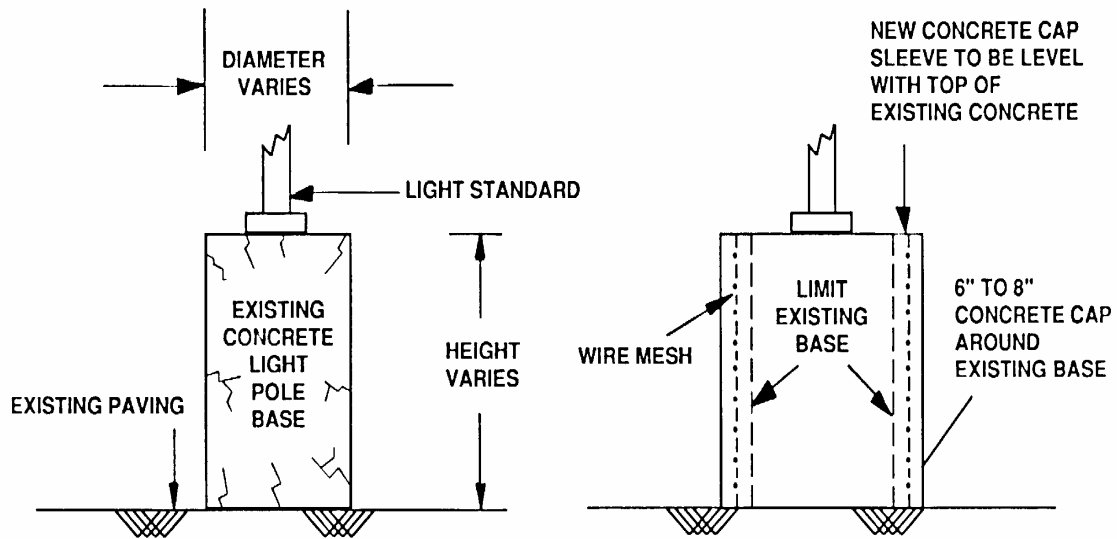

**EXISTING BASE - DEFECTIVE CONCRETE**

**RESTORED CONCRETE BASE**

1. Clean and remove loose defective concrete from bases.
2. Install form of 12" to 16" greater in diameter than existing bases around base.
3. Reinforce with one layer of welded wire mesh.
4. Fill form with concrete and finish.
5. Remove form after 15 days.